


## Dimensions

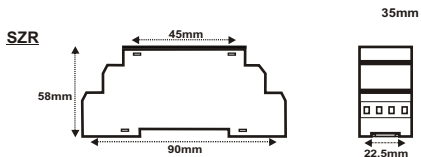


**KARACA**  
ADRESS : Dudullu Organize sanayi Bölgesi Esenşehir Mahallesi,  
DES sanayi Sitesi A8 bl.104 sk. No: 48 İSTANBUL  
Tel: 444 4 575 Faks: 0216 612 36 40 web:www.krk.com.tr

**KRK**<sup>®</sup>

2001  
9001.2008

## Delay Off TIMERS SZR B

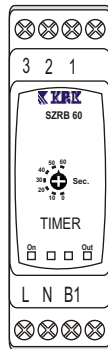

## USER GUIDE

KL-13/REV 00

## General Specifications

**KZR / SZR** time relays are delay off timer. When the supply voltage applied to the supply terminals of the relay "ON" Led and "OUT" Led of the realy are lit.and the counter in the time relay starts counting. ( 2-3 contacts are shortcut. )At the end of the set time, the "OUT" Led goes off and the relay leaves. ( 1-2 contacts are shortcut )

## Technical specifications

Type	Time Interval	Electrcal connection	Weight (kg)
SZR B 30	0,01...30sec	PCB Clamp	0,09
SZR B 60	0,01...60sec	PCB Clamp	0,09
SZR B 06	0,01...6sec	PCB Clamp	0,09
SZR B 03	0,01...3sec	PCB Clamp	0,1

## Supply Voltage

: 220 Vac  $\pm$  %20 ( L,N ), 50 / 60 Hz  
: 24 V ac/dc  $\pm$  %10 ( N,B1)

## Power Consumption

: < 7 VA

## Ambiant Temperature

: -5 °C...+55 °C

## Control Realay

: Relay ,1 Inversör, 10A / 250 Vac (Omron)

## Electrical Life

: 100.000 on /off ( Resistive )

## Connection

: DIN 35 rail , or vertical installation ( installation Springs behind the box should be pushed outward to enablescrewing )

## Connection diagrams

