


## Dimensions



## DELAY OFF DIGITAL TIMER

ADZ

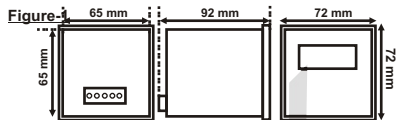

ADRESS : Dudullu Organize sanayi Bölgesi Eсеşehir Mahallesi,  
DES sanayi Sitesi A8 bl.104 sk. No: 48 İSTANBUL  
Tel: 444 4 575 Faks: 0216 612 36 40 web:www.krk.com.tr

## User Guide

## General specifications

ADZ is designed with microprocessor. You can see remain time on the device screen. You can adjust the time with knob. When you press "SET" button for 3 second you can choose second/minute. After you can adjust the time with the knob.

When the device energised, adjusted time value is displayed on the screen. Out Led is on (2-3 contacts is Short cut). Relay remains on this position for adjusted time. And you can see remain time on the screen.

When reach "0" OUT Led is off.. When you make short cut of RESET input, ADZ start to count again (OUT led is on).

## Technical Specifications

<b>Supply Voltage</b>	: 220 Vac $\pm$ %20 (L - N), 50 / 60Hz
<b>ON time :</b>	1 sec....99 sec.. 1 min....99 min.
<b>Accuracy</b>	: $\pm$ %0,5
<b>Display</b>	: 2 digit, 14mm, red
<b>Power Consumption</b>	: < 2 VA
<b>Ambient Temperature</b>	: -5°C...+55 °C
<b>Electrical life</b>	: 100.000 On/Off (Omron)
<b>Control Type</b>	: Relay, 1 Inversör, 10A / 250 Vac
<b>Electrical Connectin</b>	: Socketed connector.
<b>Connectio</b>	: <b>Front Panel</b>
<b>Weight</b>	: 0,23kg

## Connection Sheme

